ITEM: CAP END TURNBUCKLE

MATERIAL: TYPE 316 STAINLESS STEEL.

FITTING TYPE: ADJUSTABLE CABLE END TURNBUCKLE FOR ATTACHING &

TENSIONING LINES.

SWAGE TYPE: MACHINE HEX SWAGE AT FACTORY (1/8" & 3/16" SIZES

ALSO AVAILABLE IN CABLECRIMP HAND SWAGE STYLE FOR ATTACHING

IN THE FIELD).

POST TYPE: METAL. WOOD POSSIBLE BUT NOT RECOMMENDED. (POSTS NOT

INCLUDED).

FASTENING TO POST: ATTACH THROUGH END/TERMINATION POST HOLES USING A

SCREW-ON END CAP

FASTENING AT ANGLES: DRILL POST HOLES AT ANGLE AND USE BEVELED WASHERS


ABLE TENSIONING: ADJUST BY TURNING TUBULAR TURNBUCKLE BODY.

RDWARE PAIRINGS: USUALLY PAIRED WITH CAP END OR ANOTHER CAP END

TURNBUCKLE. MAY ALSO USE ANY OTHER TENSION ADJUSTMENT FITTING OR

FIXED END.

FEENEY, INC.

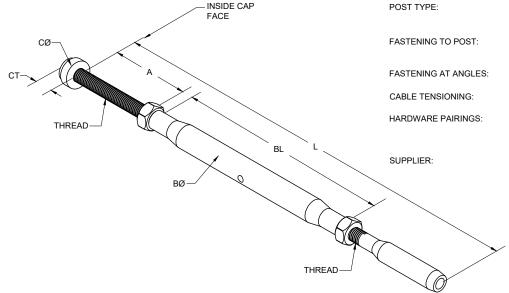

## CAP END TURNBUCKLE, STAINLESS STEEL

PART#	SWAGE TYPE	CABLE SIZE	THREAD SIZE	END CAP DIA (CØ)	END CAP THICK (CT)	*SHAFT LENGTH CLOSED (OPEN) (A)	BODY LENGTH (BL)	BODY DIA (BØ)	LENGTH CLOSED (OPEN) (L)	ATTACHMENT POST DRILL HOLE Ø
3325	MACHINE	1/8"	1/4-28	9/16"	5/16"	1-3/8" (3")	4-1/2"	7/16"	7-3/4" (10-3/4")	5/16"
3326	MACHINE	3/16"	1/4-28	9/16"	5/16"	1-3/8" (3")	4-1/2"	7/16"	8-1/4" (11-1/4")	5/16"
3327	MACHINE	1/4"	5/16-24	9/16"	5/16"	3" (5")	5-1/8"	1/2"	10-1/2" (14-1/4")	3/8"
3328	CABLECRIMP	1/8"	1/4-28	9/16"	5/16"	1-3/8" (3")	4-1/2"	7/16"	8-1/2" (11-1/2")	5/16"
3329	CABLECRIMP	3/16"	1/4-28	9/16"	5/16"	1-3/8" (3")	4-1/2"	7/16"	8-3/4" (11-3/4")	5/16"

<sup>\*</sup>LONGER SHAFT LENGTHS ARE AVAILABLE AS A SPECIAL ORDER

## CableRail Reference Drawing:

## CAP END TURNBUCKLE

DATE:	05/15/13	_
PAGE:	1 of 1	•
REV:	A (12/13/17) MRJ	
BY:	DSY	
CHK:	BWA	



P: 800-888-2418 F: 510-893-9484 www.feeneyinc.com