ITEM: JAW TURNBUCKLE

MATERIAL: TYPE 316 STAINLESS STEEL.

FITTING TYPE: ADJUSTABLE CABLE END TURNBUCKLE FOR ATTACHING &

TENSIONING LINES.

SWAGE TYPE: MACHINE HEX SWAGE AT FACTORY (1/8" & 3/16" SIZES

ALSO AVAILABLE IN CABLECRIMP HAND SWAGE STYLE FOR

ATTACHING IN THE FIELD).

POST TYPE: METAL OR WOOD. (POSTS NOT INCLUDED).

FASTENING TO POST: ATTACH TO EYE BOLTS, LAG EYES, EYELETS OR

WELDED TAB EYES ON END/TERMINATION POST OR

WALL USING REMOVABLE CLEVIS PIN.


FASTENING AT ANGLES: TURNBUCKLE PIVOTS UP TO 180 DEGREES AT CLEVIS PIN

CABLE TENSIONING: ADJUST BY TURNING TUBULAR TURNBUCKLE BODY.

RINGS: USUALLY PAIRED WITH JAW END OR ANOTHER JAW TURNBUCKLE. MAY ALSO

USE ANY OTHER TENSION ADJUSTMENT FITTING OR FIXED END.

FEENEY, INC.

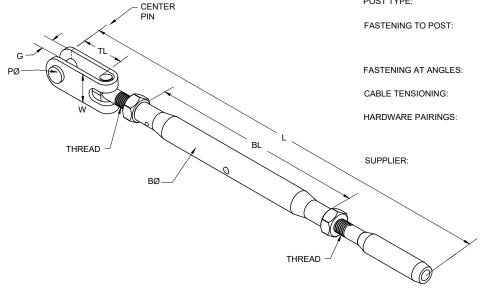

JAW TURNBUCKLE, STAINLESS STEEL

PART#	SWAGE TYPE	CABLE SIZE	THREAD SIZE	PIN DIA. (PØ)	THROAT (TL)	GRIP (G)	FLANGE WIDTH (W)	BODY LENGTH (BL)	BODY DIA (BØ)	LENGTH CLOSED (OPEN) (L)	ATTACHMENT POST PIN DRILL HOLE Ø
3270	MACHINE	1/8"	1/4-28	1/4"	15/16"	5/16"	5/8"	4-1/2"	7/16"	7-3/4" (10-3/4")	5/16"
3271	MACHINE	3/16"	1/4-28	1/4"	15/16"	5/16"	5/8"	4-1/2"	7/16"	8-1/4" (11-1/4")	5/16"
3332	MACHINE	1/4"	5/16-24	5/16"	1"	3/8"	3/4"	5-1/8"	1/2"	9-1/4" (13")	3/8"
3268	CABLECRIMP	1/8"	1/4-28	1/4"	15/16"	5/16"	5/8"	4-1/2"	7/16"	8-1/2" (11-1/2")	5/16"
3269	CABLECRIMP	3/16"	1/4-28	1/4"	15/16"	5/16"	5/8"	4-1/2"	7/16"	8-3/4" (11-3/4")	5/16"

CableRail Reference Drawing:

JAW TURNBUCKLE

DATE: 05/15/13
PAGE: 1 of 1
REV: A (12/15/17) MRJ
BY: DSY
CHK: BWA



2603 Union St., Oakland, CA 94607 P: 800-888-2418 F: 510-893-9484 www.feeneyinc.com