



DesignRail® Horizontal CableRail Infill

Make your railing view-friendly with the original stainless steel cable infill.

FLEXIBLE FRAME DESIGN

- Powder Coated extruded aluminum frame with Stainless Steel Fasteners
- 36", 39" or 42" standard heights (*custom heights available*)
- 6' on center max. post spacing
- Compatible with 6 Standard Top Rail Profiles
- All post and pickets come pre-drilled, ready for cable installation

ColorEasy™ FRAME COLOR OPTIONS

- Durable, powder coated finishes adhere to AAMA-2604 coating specifications for superior color retention, impact resistance, and weather protection.
- Choose from the top selling colors listed here or go online to feeneyinc.com/ColorEasy to see more options.



HORIZONTAL CABLERAIL

- 316-grade stainless steel kits include all of the attachment fittings and come in standard lengths
- Pre-fabricated 1/8" or 3/16" diameter stainless steel CableRail Kits for easy cable installation (1/8" comes in *Standard or Conceal*)
- A vertical intermediate picket is used mid-span to minimize cable deflection



Horizontal CableRail

with No Bottom Rail



Horizontal CableRail


with Bottom Rail
(recommended if 42" or higher)



Horizontal CableRail

with Bottom Rail &
Intermediate Rail

ASSEMBLY DIAGRAMS

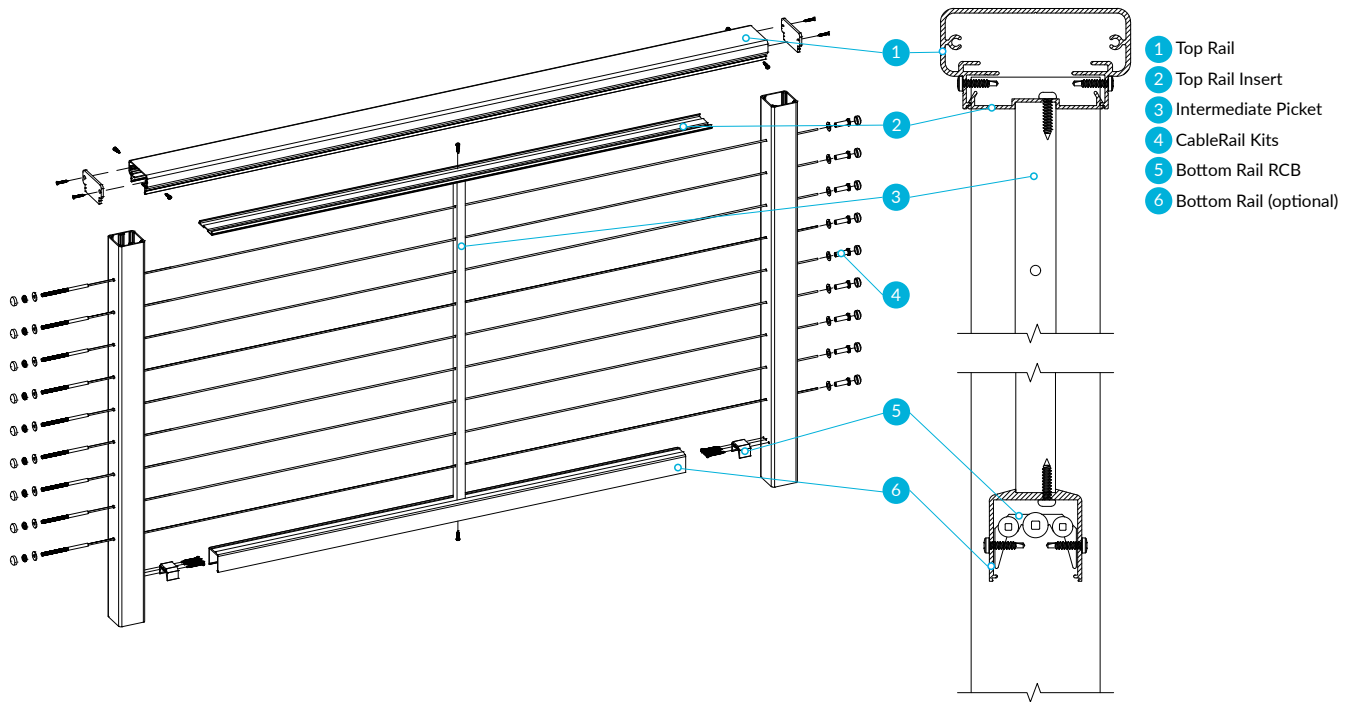

ALUMINUM FRAME & FASTENER SPECIFICATIONS

Extrusion Type	Alloy	Specification
Posts, RCBs, Splice Tubes, Fascia Brackets	6005A-T5	ASTM B221
Top Rail, Bottom Rail, Intermediate Rail, Snap Cap, Inserts, Pickets	6063-T6	ASTM B221 AMSQA200/9
Handrail Extrusion	6063-T52	ASTM B221 ASTM B429

Fastener	Alloy	Specification
Lag Screws	Type 18-8 Stainless Steel	ANSI/ASME B18.2.1-2012
Thru-Bolts/Cap Screws	Type 18-8 Stainless Steel	ASTM F593017 CW
Assembly Screws	Type 410 Stainless Steel	ANSI/ASME B18.6.4

CABLERAIL SPECIFICATIONS

Alloy	Specification
Type 316 Stainless Steel	AISI Type 316 ASTM A492

See [Warranty and Care brochure](#) or scan the QR code to learn more about our product maintenance guidelines and warranty information.



MAINTENANCE GUIDELINES

Stainless steel cables should be cleaned periodically. Cleaning frequency will depend on the environmental conditions that the product is placed in. Feeney recommends our Stainless Steel Cleaner & Protectant Kit for maintaining stainless steel products. Alternatively, warm water and mild soap can be used.

Rinse your railing frame with fresh water. Remove dust and dirt with a soft cloth or sponge and a solution of mild soap and/or liquid detergent in water. Always use a soft, damp cloth to blot dry. Avoid harsh solutions or abrasive cleaning compounds, included but not limited to: alkaline or acidic cleaners, solutions containing trisodium phosphate, phosphoric acid, hydrofluoric acid, gasoline, benzene, acetone, carbon tetrachloride, certain deicing fluids, lacquer thinner or other strong solvents.

Product should be cleaned when the metal is shaded.

