

MORE INFO:



RESIDENTIAL OR COMMERCIAL APPLICATIONS



DOCK·RAIL™

Durable Aluminum Railing with CableRail for Docks

Feeney® DockRail™ is now available, offering a seamless transition from land to water. DockRail™ is designed to ensure long lasting beauty and durability - perfect for the marine environment.

MARINE-GRADE FRAME DESIGN

- Powder-coated aluminum with stainless steel fasteners
- Rail and Post Kits designed for level dock applications
- Fascia mounted using 3/8" diameter stainless steel lag screws
- Series 200, Rectangular Top Rail
- Posts are pre-drilled for 5 CableRail Standard 1/8" Kits
- Railing height 36" with no bottom rail

FRAME COLOR OPTIONS

- Durable, powder coated finishes adhere to AAMA-2604 coating specifications for superior color retention, impact resistance, and weather protection.



TEXTURED
BLACK




BRIGHT
WHITE



SILVER

HORIZONTAL CABLERAIL INFILL

- Pre-fabricated 1/8" diameter CableRail Kits include all of the attachment hardware and come in standard lengths
- Made from high quality 316-grade stainless steel for weather-tough durability and very low maintenance

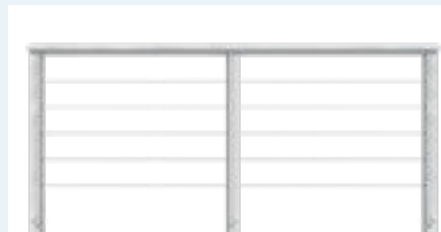

200 Series Top Rail with no Bottom Rail



VIDEO: Introducing DockRail™

ASSEMBLY DIAGRAM

DOCKRAIL™ COMPONENTS

1 DockRail™ Post Kit


- 1a POST
- 1b BOTTOM POST CAP

2 DockRail™ Rail Kit

- 2a 200 TOP RAIL (10-FT)
- 2b TOP RAIL INSERT

3 End Plate Kit

- 4 CableRail Kit (1/8")
- 5 CableRail End Cap

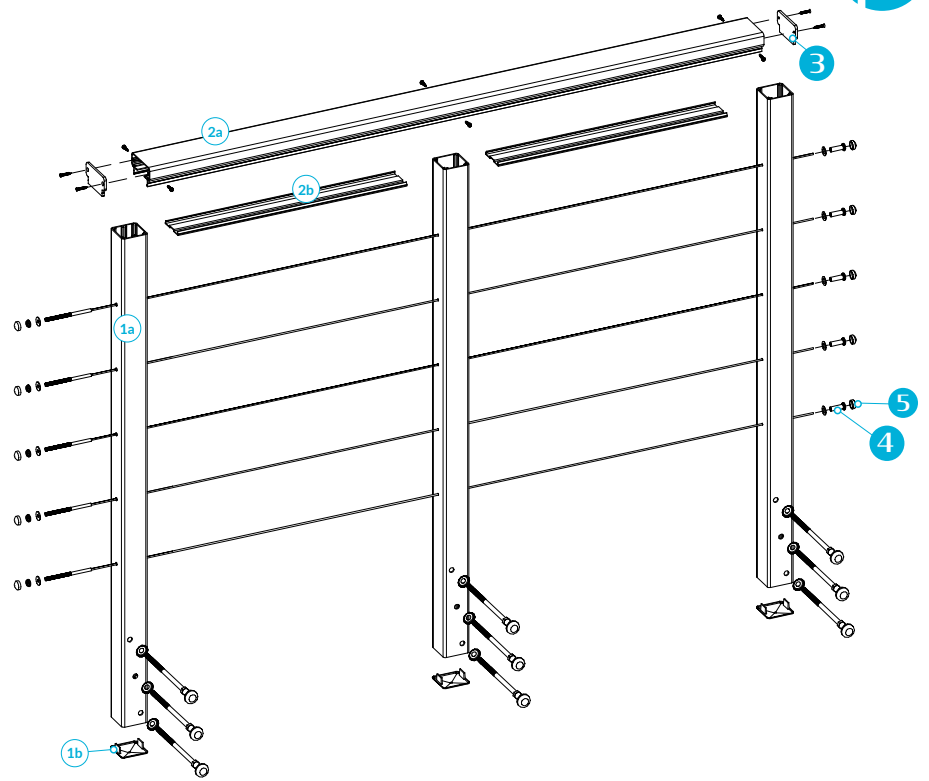

ALUMINUM FRAME & FASTENER SPECIFICATIONS

| Extrusion Type | Alloy | Specification |
|--|----------|-------------------------|
| Posts, RCBs, Splice Tubes, Fascia Brackets | 6005A-T5 | ASTM B221 |
| Top Rail, Bottom Rail, Intermediate Rail, Snap Cap, Inserts, Pickets | 6063-T6 | ASTM B221 AMSQA200/9 |
| Handrail Extrusion | 6063-T52 | ASTM B221 ASTM B429 |

| Fastener | Alloy | Specification |
|-----------------------|---------------------------|---------------------------|
| Lag Screws | Type 18-8 Stainless Steel | ANSI/ASME B18.2.1-2012 |
| Thru-Bolts/Cap Screws | Type 18-8 Stainless Steel | ASTM F593017 CW |
| Assembly Screws | Type 410 Stainless Steel | ANSI/ASME B18.6.4 |

CABLERAIL SPECIFICATIONS

| Alloy | Specification |
|--------------------------|----------------------------|
| Type 316 Stainless Steel | AISI Type 316 ASTM A492 |



See [Warranty and Care brochure](#) or scan the QR code to learn more about our product maintenance guidelines and warranty information.

FEENEY IS A PROUD MEMBER OF:



MAINTENANCE GUIDELINES

Stainless steel cables should be cleaned periodically. Cleaning frequency will depend on the environmental conditions that the product is placed in. Feeney recommends our Stainless Steel Cleaner & Protectant Kit for maintaining stainless steel products. Alternatively, warm water and mild soap can be used.

Rinse your railing frame with fresh water. Remove dust and dirt with a soft cloth or sponge and a solution of mild soap and/or liquid detergent in water. Always use a soft, damp cloth to blot dry. Avoid harsh solutions or abrasive cleaning compounds, included but not limited to: alkaline or acidic cleaners, solutions containing trisodium phosphate, phosphoric acid, hydrofluoric acid, gasoline, benzene, acetone, carbon tetrachloride, certain deicing fluids, lacquer thinner or other strong solvents.